


tecniwell




GP37H / GP45H / GP55H

HORIZONTAL GROUT PUMP

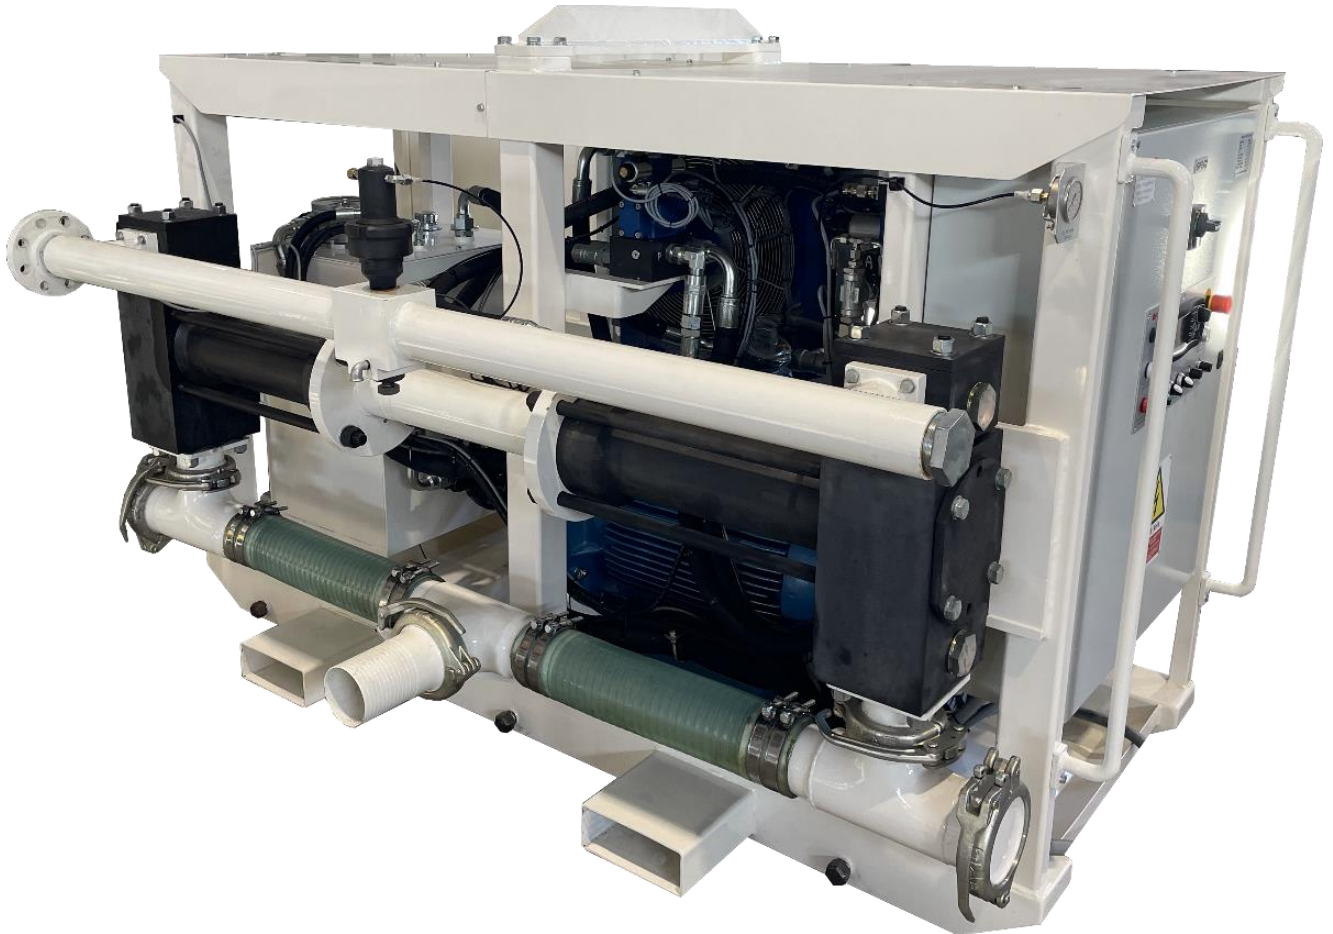

GP37H and GP45H
Dimensions and weight

Width	1400 mm	4'7"
Lenght	2360 mm	7'9"
Height	1640 mm	5'5"
Weight	2500 Kg	5511 lb

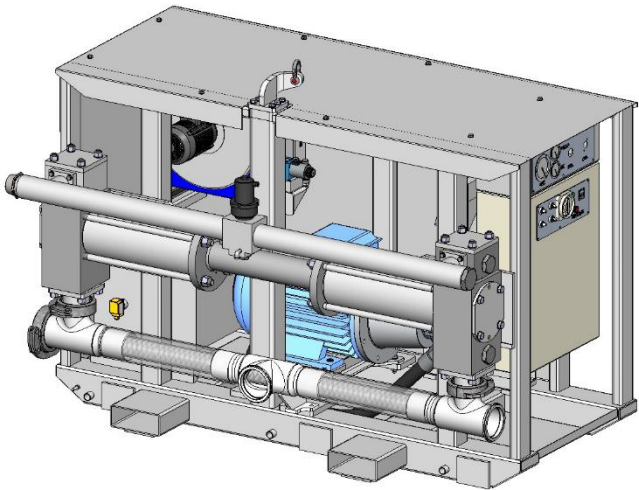

TECHNICAL FEATURES

Double piston / piston double / Doppelkolben

Max flow rate / débit maximale / maximale Durchflussrate

Max pressure rate / pression maximale / maximal Druckrate

Piston diameter / diamètre du piston / Kolbendurchmesser

Stroke / course / Hubweg

Electric motor / moteur électrique / Elektromotor

Suction diameter / diamètre d'aspiration / Saugdurchmesser


Output diameter / diamètre de sortie / Ausgangsdurchmesser




GP37H	GP45H	GP55H
550 lt/min 145 gpm	580 lt/min 153 gpm	800 lt/min 211 gpm
50 bar - 5 Mpa - 725 PSI		
6" - 7" - 7"1/2 152,4 - 177,8 - 190,5		
16" - 406 mm		
37 kW	45 kW	55 kW
5" - 127 mm		
3" - 76,2 mm		

DIAGRAMMA PORTATA - PRESSIONE
PRESSURE-FLOW RATE DIAGRAM

PORTATA - FLOW RATE
(gpm)

GP37H

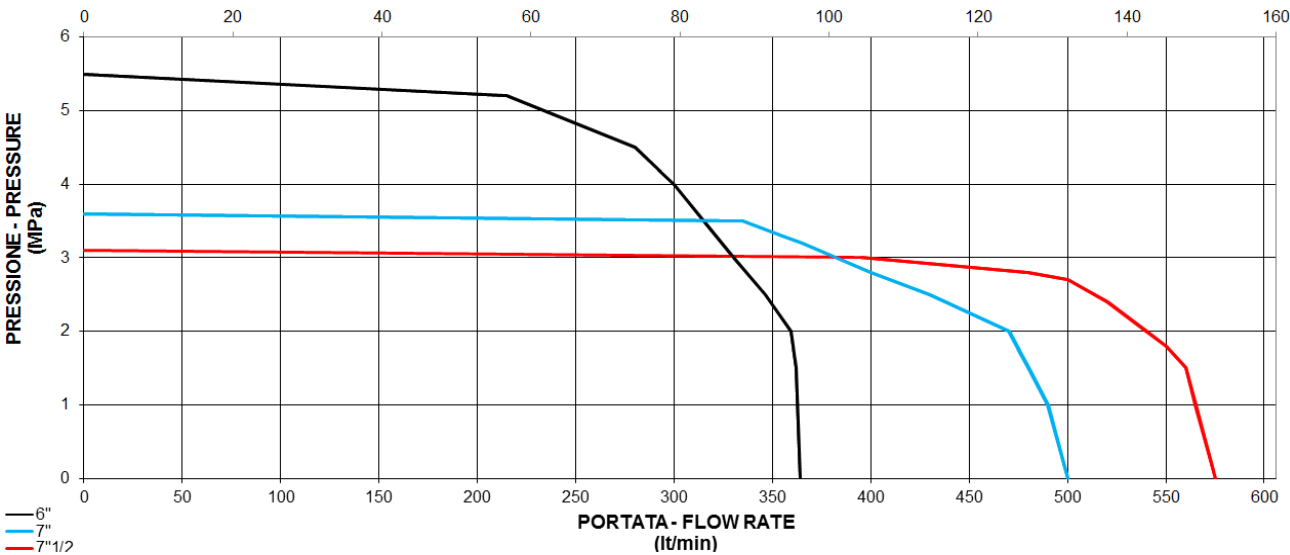

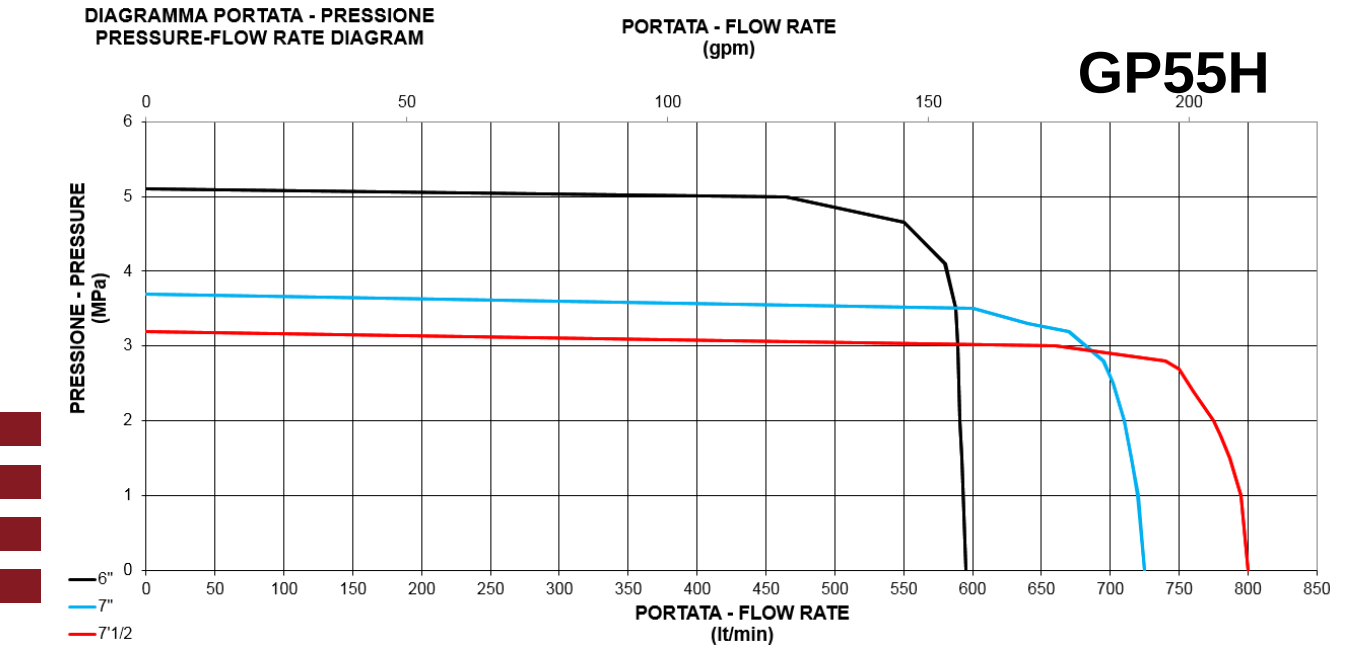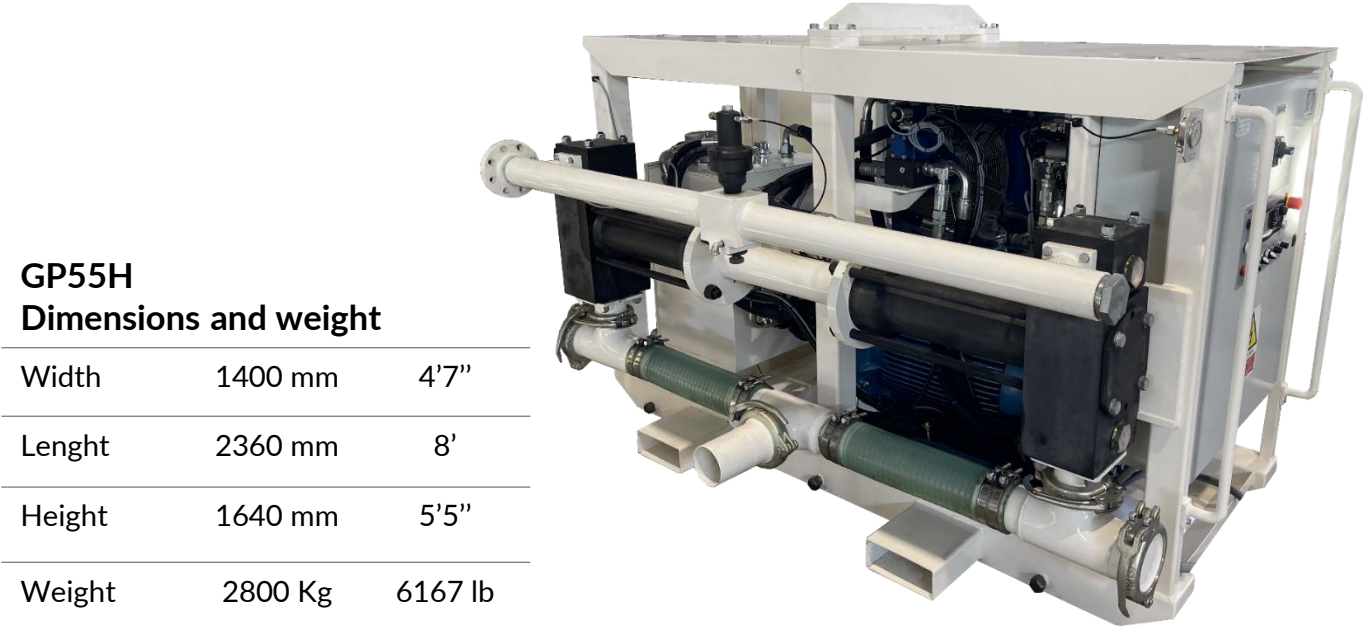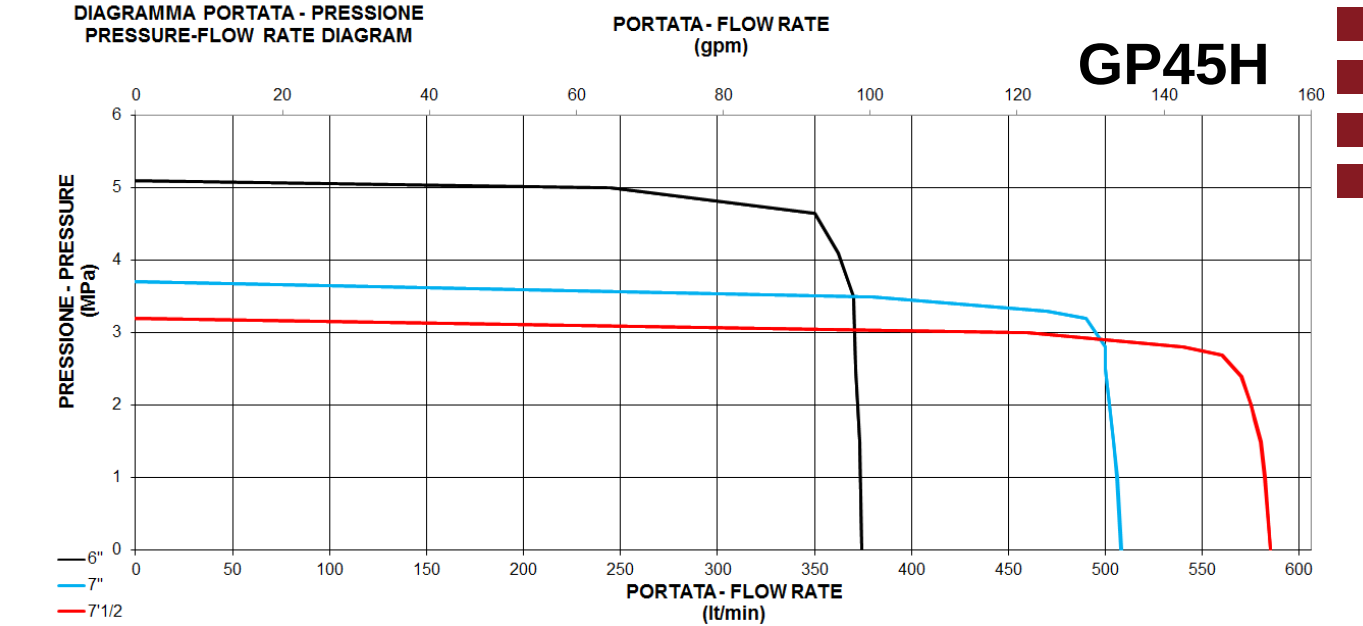



Productivity and Reliability with full **Safety** compliance.



tecniwell

Via 1° Maggio, 35 – 29027 Podenzano (PC) – Italy – Tel. + 39 0523 524086
e-mail: info@tecniwell.com – www.tecniwell.it

Data are indicative and subject to change without notice, the version shown may have particular features or options not included in the standard model

