




DRILLING

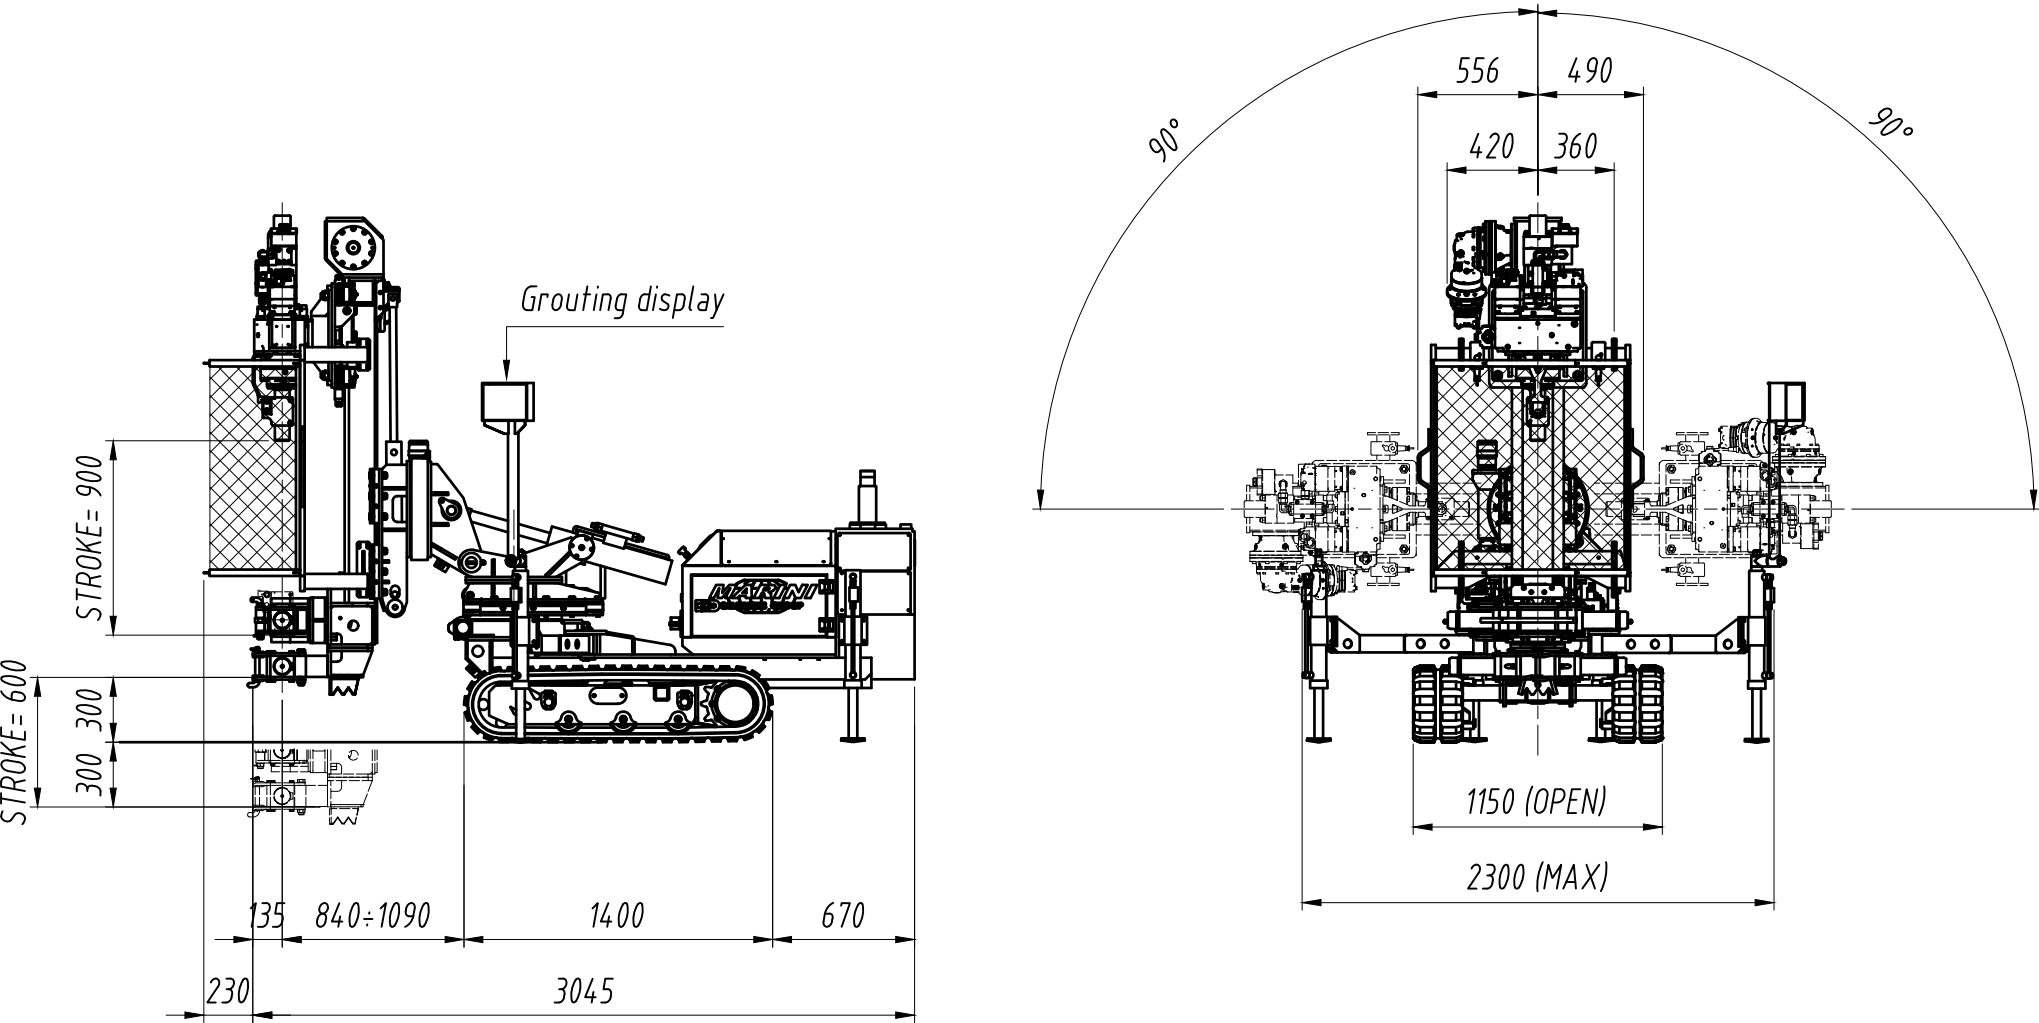


TRANSPORT

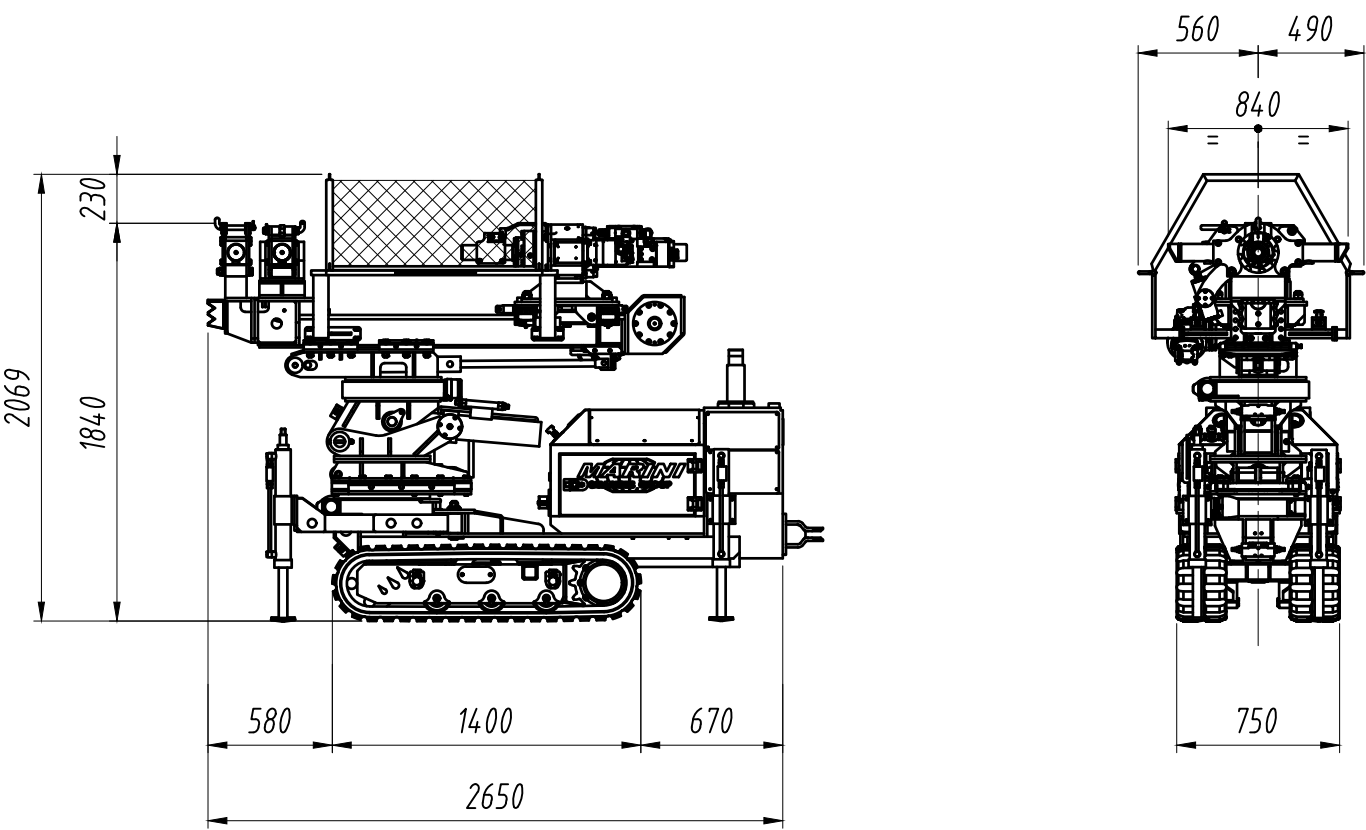


MAST CONFIGURATION

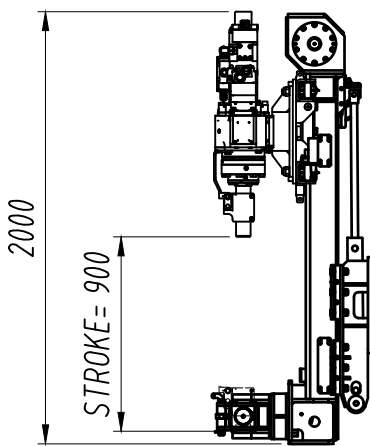

CID 250 MAST - STROKE= 900
ROD BREAKER CLAMP 70÷188

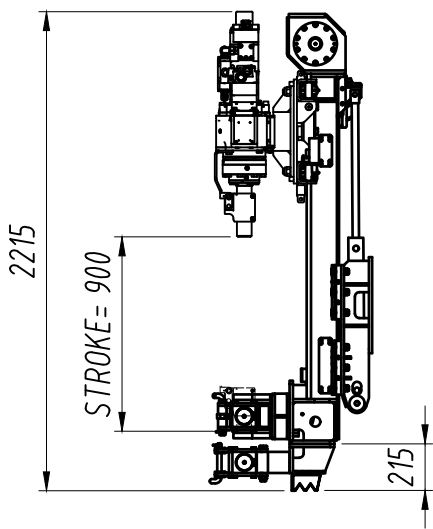

CID 250 MAST - STROKE= 900
ROD BREAKER CLAMP 70÷188
CLAMP 70÷188

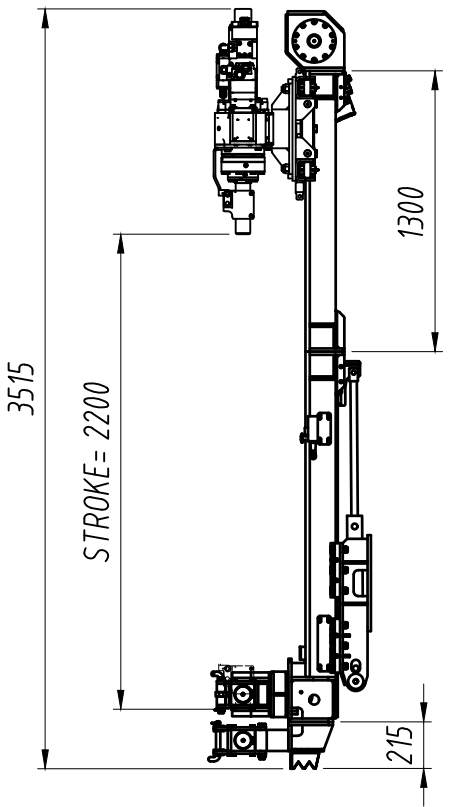

CID 250 MAST - STROKE= 1300
ROD BREAKER CLAMP 70÷188
CLAMP 70÷188