


HG28-HH1265

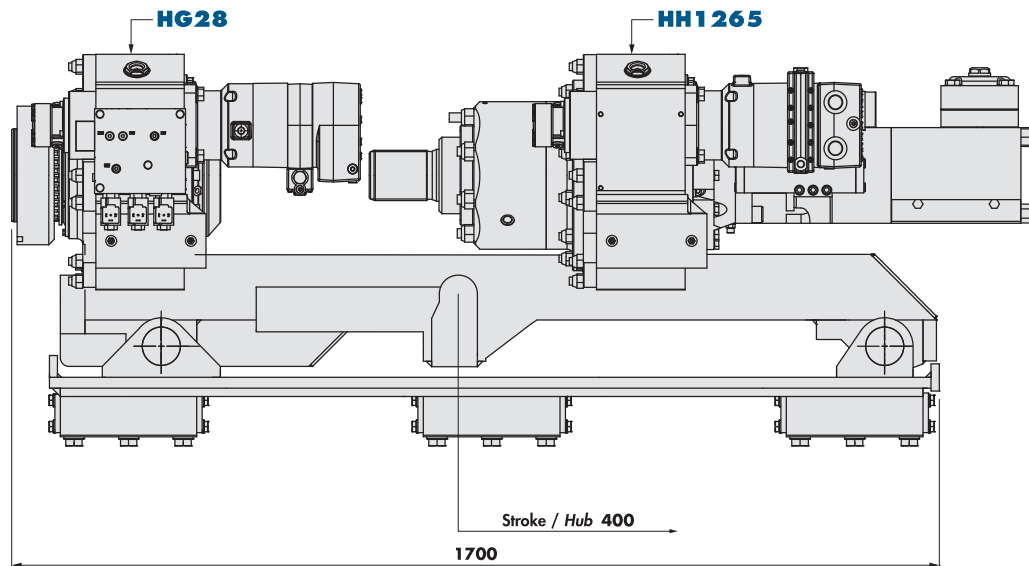

Weight / Gewicht 985 kg

Technical specifications / Technische Daten

HG28

Displacement	Schluckvolumen	cm ³	677				
Hollow shaft Ø	Abtriebswelle innen Ø	mm	110				
Max. oil flow	Max. Ölmenge	l/min	170				
Max. pressure	Max. Arbeitsdruck	bar	275				
Speed	Drehzahl	Gear / Gang	1	2	3	4	5
		min ⁻¹ / rpm	27	32,5	41	54	82
Torque	Drehmoment		1	2	3	4	5
		kNm	27	23	18	13,5	9

HH1265

Displacement	Schluckvolumen	cm ³	344				
Max. oil flow	Max. Ölmenge	l/min	170				
Max. pressure	Max. Arbeitsdruck	bar	250				
Speed	Drehzahl	Gear / Gang	1	2	3	4	5
		min ⁻¹ / rpm	53	64	80	106	161
Torque	Drehmoment	Gear / Gang	1	2	3	4	5
		kNm	13	10	8	6	4
Shank adapters/Striker bars	Einsteckenden	LH / RH	H90				

Percussion unit Schlagwerk

Operating pressure	Arbeitsdruck	bar	160 - 200				
Oil capacity	Ölmenge	l/min	70 - 90				
Single blow energy	Einzelschlagenergie	NM	... 650				
No. of blows	Schlagfrequenz	min ⁻¹	... 2300				